








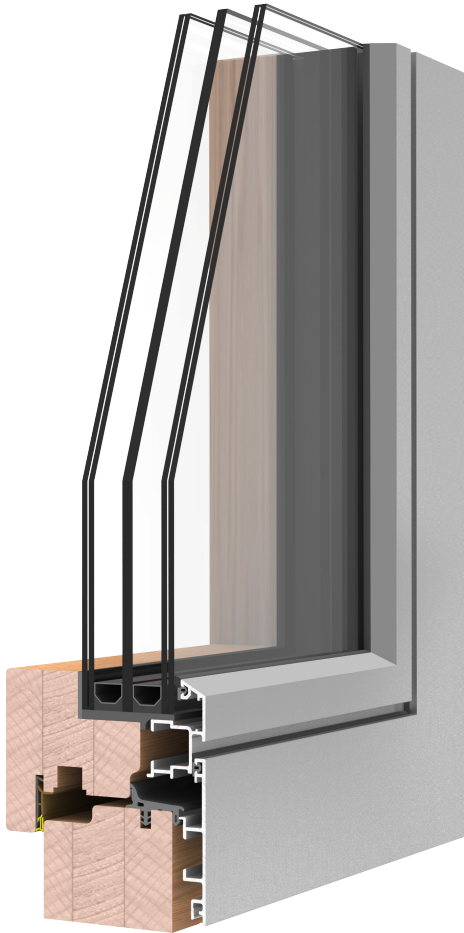

OPEN  
IN

**TOTAL**  
FACADE SOLUTIONS

TRIPLE GLAZING **U<sub>w</sub>=0,8 W/m<sup>2</sup>K**



Material		Wood-Aluminium
Thermal insulation		U <sub>w</sub> = 0,8 W/m <sup>2</sup> K
Insulating glass		Triple glazing thickness 44 mm
Acoustic insulation		R <sub>w</sub> up to 43 dB
Security hardware		Up to RC2
<b>Dimensions in mm.</b>		
Thickness of sash		98,5 x 70 mm
Thickness of frame		77,5 x 72,5 mm
Visible section sash + frame		106 mm
Visible section middle clamp		116 mm
Air permeability		CLASS 4
Water tightness		CLASS E1350
Wind load resistance		CLASS C5

The thermal transmittance values are calculated according to UNI EN 10077/1-2018, UNI EN 10077/2-2018, UNI EN 10456-2008, UNI EN 673-2011 standards, in reference to a window with 1 sash WxH (1230x1480mm,  $\psi_g = 0,04$  W/mK)

The air-water-wind tightness performances are certified in reference to a window with 2 sashes WxH (1500x1500mm)

The acoustic insulation values are certified in reference to a window with 1 sash WxH (1230x1480mm)



**COPLANAR - 44 mm glass  
SOFT WOOD  
U<sub>f</sub> = 1,3 W/m<sup>2</sup>K**

U <sub>g</sub> W/m <sup>2</sup> K	U <sub>w</sub> W/m <sup>2</sup> K
0,5	-> 0,8
0,6	-> 0,9
0,7	-> 1,0
0,8	-> 1,0
0,9	-> 1,1
1,0	-> 1,2
1,1	-> 1,3

**TOTAL**  
FACADE SOLUTIONS

748 Marine Dr,  
North Vancouver, BC

778 729 1575  
contact@totalproject.ca